


## U.S. installation guideline

# linea classic s

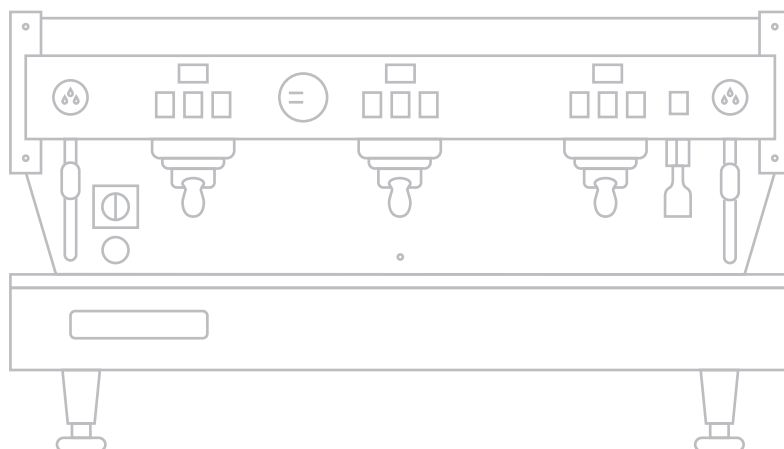

| Specifications          | 1 group             | 2 group             | 3 group             | 4 group             |
|-------------------------|---------------------|---------------------|---------------------|---------------------|
| Height                  | 20.5"               | 20.5"               | 20.5"               | 20.5"               |
| Width                   | 20"                 | 28"                 | 37"                 | 46"                 |
| Depth                   | 23"                 | 23"                 | 23"                 | 23"                 |
| Weight                  | 90 lbs              | 130 lbs             | 164 lbs             | 236 lbs             |
| <b>Power</b>            |                     |                     |                     |                     |
| Voltage/Phase/Cycle     | 208-240 VAC 1Φ 60Hz | 208-240 VAC 1Φ 60Hz | 208-240 VAC 1Φ 60Hz | 208-240 VAC 1Φ 60Hz |
| Wattage                 | 2500                | 4600                | 6100                | 8000                |
| Full Load Amp Draw      | 12                  | 22                  | 28                  | 37                  |
| Max. Dist. from Outlet* | 5'                  | 5'                  | 5'                  | 5'                  |
| NEMA Plug and Outlet*   | 6-20P; 6-20R        | 6-30P; 6-30R        | 6-50P; 6-50R        | 6-50P; 6-50R        |

| <b>Water</b>             |                                                                 | <b>Drainage</b> |                    | <b>External Pump</b>          |                 |
|--------------------------|-----------------------------------------------------------------|-----------------|--------------------|-------------------------------|-----------------|
| Water Flow Rate          | 2GPM                                                            | Max. Dist.*     | 5'                 | Dimensions                    | 12" × 12" × 12" |
| Dynamic Water Pressure † | 45PSI                                                           | Drain Slope*‡   | Min. 1/4" per foot | Max. Dist. from Water Supply* | 4'              |
| Min. Pipe Size Diameter* | 3/8"                                                            |                 |                    | Max. Dist. from Machine       | 8'              |
| Water Connection*        | 3/8" male comp.                                                 |                 |                    | Counter Hole Diameter         | 2.5"            |
| Water Quality            | Contact us for a free water test kit. See water specifications. |                 |                    |                               |                 |

\* suggested | † regulate as needed | ° Height from the base of the machine to the group head

‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes



# la marzocco

handmade in florence

